




SIGNATURE BARRIER ACOUSTIC CEILING TILES

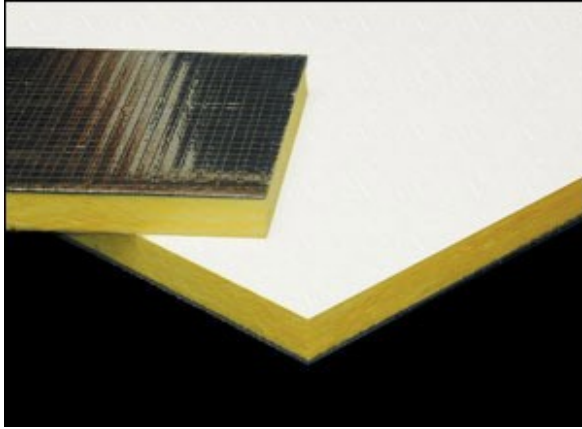

DESCRIPTION

The Signature Barrier Acoustic Ceiling Tile is a double duty soundproofing ceiling tile. It works for both lowering sound transmission as well as reducing reverberation.

The ceiling tile consists of a 1" thick 6 pound density fiberglass, barrier backing and covered with your choice of three facings.

This tile has an absorption of NRC .85, and the attached AudioSeal Sound Barrier with an aluminized facing adds a strong sound blocking rating of STC 26. This double rating is not found in standard acoustic ceiling tiles.

Signature tiles are Class 1 Fire Rated and come in standard sizes of 2' x 2' and 2' x 4' and standard thickness of 1-1/8".

TECHNICAL CHARACTERISTICS

Size	2' x 2', 2' x 4'
Thickness	1-1/8"
Finishes	White Pebble Grain Vinyl, White Nubby Cloth, Black Felt



SOUND ABSORBING PERFORMANCE

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC*
.14	.27	.80	1.11	1.14	1.14	.85

*Noise Reduction Coefficient

SOUND BLOCKING PERFORMANCE

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	STC*
13	17	22	26	32	37	26

*Sound Transmission Class

FEATURES

- Sound absorbing and sound blocking
- Class 1 Fire Rated
- Fits into 2' x 4' or 2' x 2' drop ceiling grids

COMMON APPLICATIONS

- Commercial Spaces
- Cinemas and Home Theaters
- Production Studios
- Schools and Universities
- Government Facilities
- Houses of Worship
- Restaurants and Hospitality



AC100
Pebble Grain Vinyl



AC200
Nubby White Cloth

