


AlphaPyramid Foam

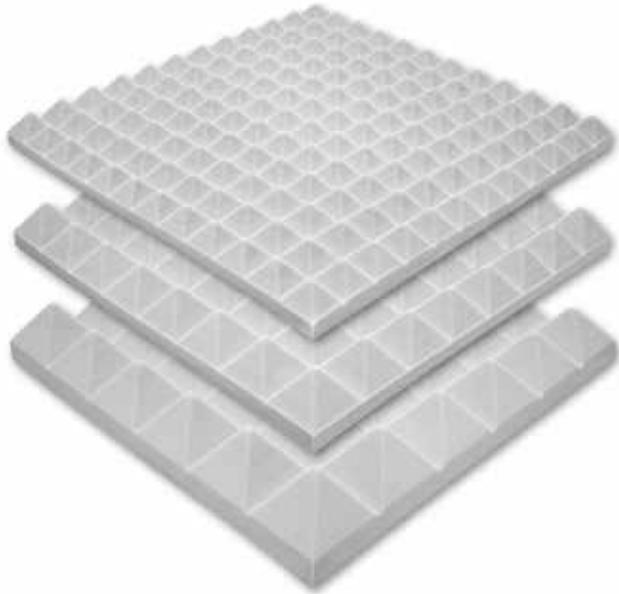

TECHNICAL CHARACTERISTICS

SIZE: 2' x 2'

THICKNESS: 2", 3" 4"

MATERIAL: Open-cell malamine based foam

COLORS: Grey, White

FIRE RATING: Class 1 or A per ASTM E 84

DESCRIPTION

AlphaPyramid foam is a cost-effective, high-performing acoustic foam sheet used to reduce reverberation to improve speech intelligibility. The sound absorbing capabilities of these products improve the overall acoustics in a room by reducing reverberation.

Class 1 fire rated AlphaPyramid[®] Acoustic Foam has a unique surface pattern that is matching and seamless when installed. With an NRC .75 – 1.00, AlphaPyramid[®] acoustical foam is a powerful sound absorber that dramatically reduces echo, reverberation and standing waves in all types of facilities.

AlphaPyramid[®] Acoustic Foam gives you one uniform look to a treated wall, and is ideal for any application where sound absorption and aesthetics are both considerations. AlphaPyramid[®] Foam is fire rated acoustical foam is available in grey and white colors, in sheet sizes of 2'x 2' and is available in 2", 3" or 4" thickness. AlphaPyramid[®] Foam is ideal for recording studios as well as home recording studios.

SOUND ABSORPTION

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
2"	0.09	0.28	0.79	0.94	1.00	1.04	0.75
3"	0.10	0.48	0.91	1.11	1.11	1.14	0.90
4"	0.16	0.56	1.11	1.13	1.13	1.21	1.00

