

SONEX[®] RONDO SOUND BAFFLE DATA SHEET



DESCRIPTION

The Sonex[®] Rondo Sound Baffle offers design versatility and excellent sound absorption across all frequencies—preventing noise build-up that interferes with speech intelligibility. Sonex Rondo[®] Baffles are made from Willtec[®] foam, which is Class 1 fire-rated according to ASTM E84 for flame spread and smoke density. Willtec[®] natural also meets the corner burn test UL 1715.

These Sonex[®] Rondo Baffles are available in lengths up to 24" with 6" or custom diameters. Offered in natural white, grey and a variety of HPC coated colors, Sonex Rondo[®] Baffles are easy to install vertically or horizontally using wall-to-wall or ceiling mounting options.

Rondo Baffles are great for use in large reception areas, multipurpose rooms, aquatic centers, manufacturing facilities and other large spaces.

TECHNICAL CHARACTERISTICS

SIZE: 6" diameter by 24" length


MATERIALS: Open-cell melamine foam core

FIRE RESISTANCE: Class 1 per ASTM E 84
Meets UL 1715 (willtec natural)

COLORS: Natural White, Natural Grey or
HPC Coated Colors

MOUNTING: Corkscrew hangers (sold separately) are installed in the field for either wall-to-wall cable installation or ceiling-mounted cable installation.

NRC: 0.75

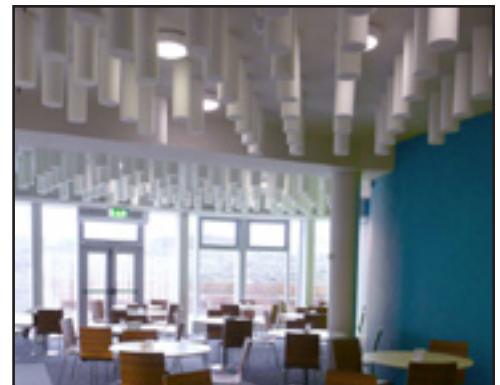

SOUND ABSORBING PERFORMANCE							
Per ASTM C423 (J-Mount)							
Finish	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
Natural Grey/White	0.08	0.30	0.77	1.00	1.01	0.97	0.75

