


**ACOUSTILIGHT™ DROP-IN FIBER OPTIC CEILING TILES**

ASI Drop-In Panels are manufactured with 2" of 3 lb. Density acoustic fiberglass for a greater than 1.0 noise reduction coefficient. These panels have unfinished square edges and are intended to be used in standard "T bar" or "grid" ceiling configurations, and have the prefer non-glare matte black finish.

ASI also offers the same Drop-In Panel in a standard 1" thick version with no stars.

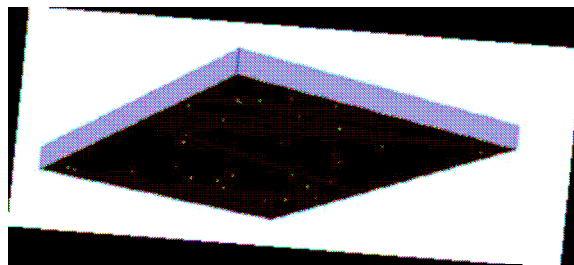

Model Number	2300	2301
Size	24" 24" x 2"	24" x 24" x 1"
Color	Matte Black	Matte Black
Star Color Temp.	6500k	NA
Number of Start	15	NA
Stars per sq. ft.	3.75	NA
Weight	2 lbs.	1 lb.
Power Requirement	12v DC	NA
Power Consumption	0.36w	NA
Fiber Glass	3 lb. Density	3 lb. Density
Noise Reduction Coefficient	> 1.0 N.R.C.	> 0.85 N.R.C.
Mounting	Drop-In/Lay-In	Drop-In/Lay-In