


**SONEX<sup>®</sup> CLEAN ACOUSTIC CEILING TILE DATA SHEET**

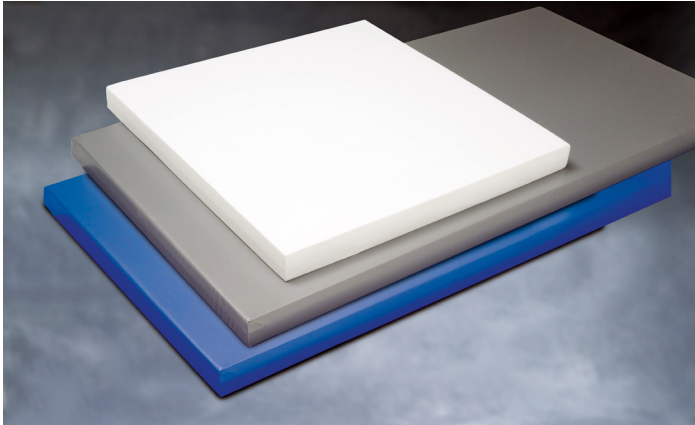

**DESCRIPTION**

SONEX<sup>®</sup> Clean acoustic ceiling tiles are designed for use in standard ceiling grids in environments that require noise control with durable, washable and cleanable materials. These drop-in ceiling tiles are ideal for use in a variety of applications, including bottling and food processing plants, clean rooms and food preparation areas. SONEX<sup>®</sup> Clean products meet USDA/FDA requirements.

The products are fully encapsulated in FR taffeta vinyl for efficient cleaning and long, durable life. They offer excellent sound absorption to reduce reverberation or echo.

The SONEX<sup>®</sup> Clean line is made from Willtec melamine foam core, which is ASTM E84 Class 1 fire-rated.

Products are available in 17 standard colors.

These panels are an excellent choice when washable, cleanable and durable sound absorption material is required to reduce reverberation or echo.



**TECHNICAL CHARACTERISTICS**

**SIZES:** 23-3/4" x 23-3/4"  
23-3/4" x 47-3/4"

**THICKNESS:** 2"

**MATERIALS:** Open-cell melamine-based foam core, PVC

**FR TAFETTA VINYL:** 4.00 mil PVC Film  
Meets California Fire Marshall Requirements Section 13115  
CA Health & Safety

**FIRE RESISTANCE:** Class 1 per ASTM E 84  
Meets UL 1715 (willtec natural)

**COLORS:** FR Tafetta Vinyl (see chart)

**NRC:** 0.75

**MOUNTING:** Simply drop into any standard ceiling grid system (see installation guide)

SOUND ABSORBING PERFORMANCE						
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
0.57	0.67	0.91	0.90	0.43	0.19	0.75

