

E-Grip III Flooring Adhesive



TECHNICAL CHARACTERISTICS

SIZE: 4 gallon

COLOR: Grey

ANTIMICROBIAL: Yes

ADHESIVE TYPE: Single component polyurethane

ADHESIVE CURE SYSTEM: Moisture-cured

FREEZE/THAW STABILITY: Stable

VOC CONTENT: 0 lbs/gal (calculated)

SOLVENTS: 0 lbs/gal (calculated)

MAXIMUM RH: 85% per ASTM F-2170

APPLICATION TEMPERATURE: 40 degrees F to 100 degrees F


FLASHPOINT: > 500 degrees F

SHELF LIFE: 12 months

WORKING TIME: 30-40 minutes

DESCRIPTION

E-Grip III Flooring Adhesive is a revolutionary zero VOC flooring adhesive to install rubber flooring and acoustic underlayments to the subfloor. The low odor, one-component urethane adhesive is formulated specifically for use with the Iso-Step[®] rubber floor underlayment family of surfacing products. It features excellent trowability and improved tack properties, making it easy to apply and create flat, concealed seams. E-Grip adhesive has been specifically engineered to be solvent-free. With a moisture-cured, no-mix, non-sag and permanently elastic formula, it provides excellent adhesion to elastomers, concrete, and wood in both indoor and outdoor applications.

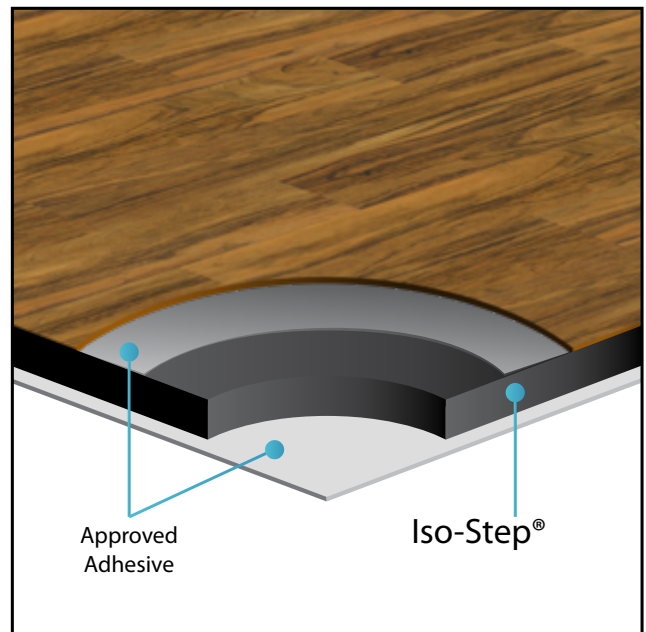

COVERAGE CHART

Trowel Size	Trowel Type	Approx. Coverage
1/16" x 1/32" x 5/64"	U-notch	120 sq ft/gal
1/16" x 1/16" x 1/16"	Square notch	95 sq ft/gal
1/8" x 1/8" x 1/8"	Square notch	60 sq ft/gal

***DELTA IIC (ΔIIC):** Quantifies the performance gain between the first and second test once an underlayment is added to the assembly.