



WHISPERWAVE[®] RIBBON ACOUSTIC FOAM DATA SHEET

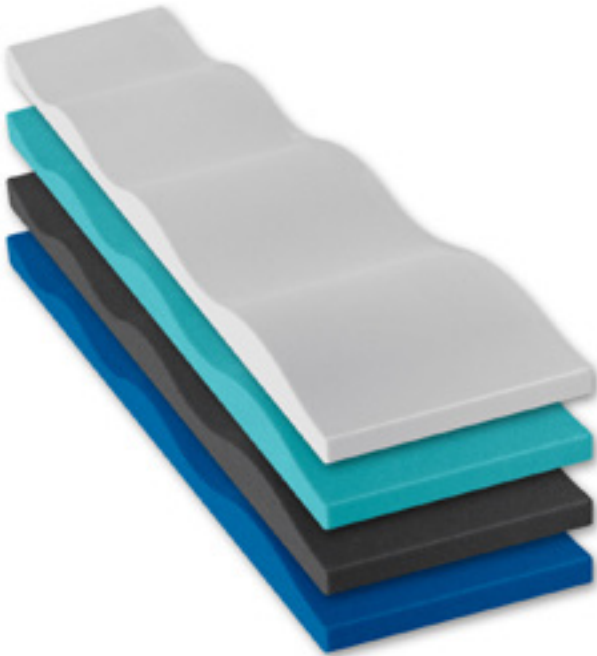

DESCRIPTION

Our Whisperwave[®] Ribbon Acoustic Foam allows you to create unique designs for direct mount wall and ceiling applications. Based on the same pattern as the Whisperwave[®] Ribbon Sound Baffle, this acoustical panel allows you to create remarkable architectural features while absorbing echo and sound.

Create a better sounding and visually captivating environment. Whisperwave[®] Ribbon Acoustic Foam Panels are available in natural melamine foam colors (natural white, natural grey) and HPC coated colors. These panels can easily be mounted to any wall or ceiling surface with a water-based construction adhesive.

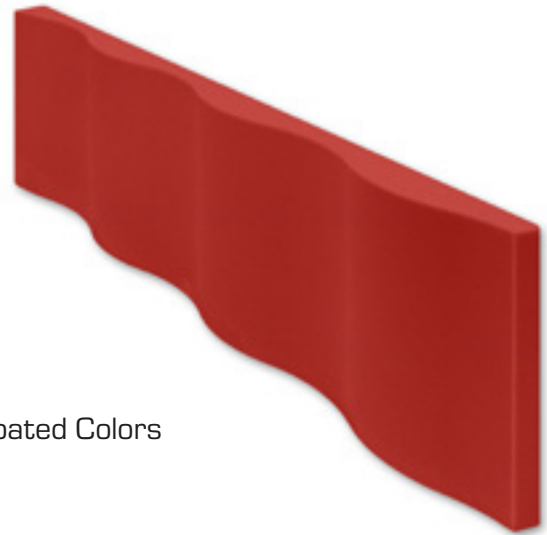

TECHNICAL CHARACTERISTICS

- SIZE:** 1' x 4'
- THICKNESS:** 2"
- MATERIALS:** Open-cell melamine foam core
- FIRE RATING:** Class 1 per ASTM E 84
Meets UL 1715 (willtec natural)
- COLORS:** Natural White, Natural Grey, or HPC Coated Colors
- NRC:** 0.80, 0.95

SOUND ABSORBING PERFORMANCE							
Finish	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
Natural Grey/White	0.05	0.31	0.81	1.01	0.99	0.95	0.80
HPC Coated	0.13	0.41	1.02	1.18	1.18	1.13	0.95

