

## AlphaSorb<sup>®</sup> Paintable Acoustic Ceiling Tile

### TECHNICAL CHARACTERISTICS

**SIZE:** 2' x 2', 2' x 4' (nominal)

**THICKNESS:** 1", 2"

**DENSITY:** 6-7 lb. / cu. f.t fiberglass board


**FINISH:** Paintable Fabric

**EDGE DETAIL:** Square, Natural

**MOUNTING:** Drop into existing T-bar grid

**FIRE RATING:** Class 1 or A per ASTM E84

**NRC:** 0.95 (1"), 0.95 (2")

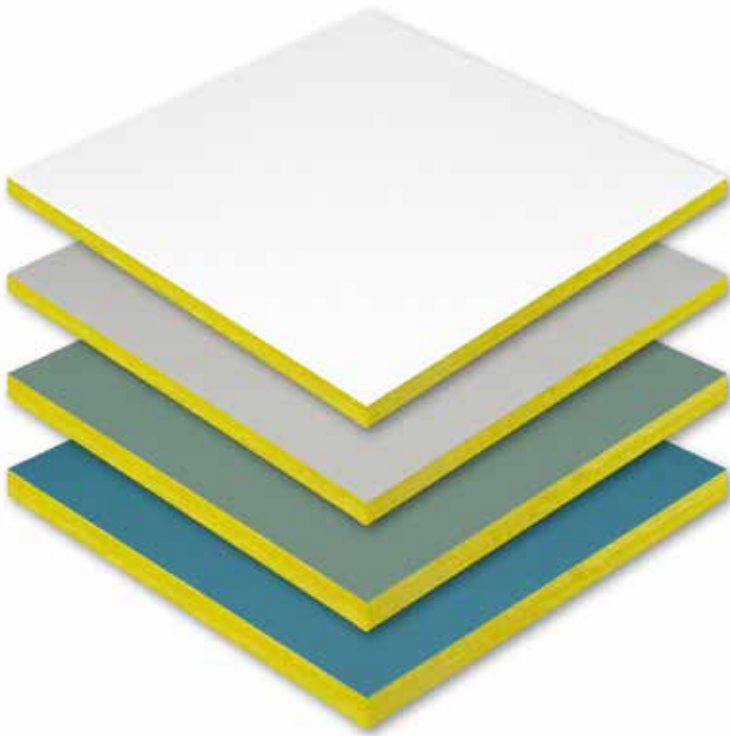

### DESCRIPTION

Our AlphaSorb<sup>®</sup> Paintable Acoustic Ceiling Tile provides a blank canvas in a finish similar to drywall ready to accept any number of paint colors for endless design possibilities. This paintable drop in ceiling tile is the best choice for projects requiring a soft white appearance or when a specific color is desired.

The AlphaSorb<sup>®</sup> Paintable Acoustic Ceiling Tile has a high-density, acoustical fiberglass core, offering excellent acoustical performance. Paintable tiles are available in 2' x 2' or 2' x 4' sizes to fit into standard T-bar suspended ceiling systems. The acoustical ceiling tiles may be installed as white panels or be painted on location in any color you desire. Spray Painting this product is best done with a non-bridging acrylic paint.

SOUND ABSORPTION (E 400 Mount)							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1"	0.80	0.89	0.82	0.96	1.03	1.10	0.95
2"	0.80	0.83	0.99	1.04	1.02	0.98	0.95

