

**ALPHAENVIRO<sup>®</sup> RIPSTOP ACOUSTIC PANEL TECHNICAL DATA SHEET**




**DESCRIPTION**

The AlphaEnviro<sup>®</sup> Ripstop Acoustic Panel offers economical sound absorption with a durable, abuse resistant finish. These acoustical panels are used to reduce and lower excessive reverberation times (RT60) in large open spaces. Available in an array of bold colors, they can be manufactured in custom sizes up to 4' x 10'. The AlphaEnviro<sup>®</sup> Ripstop Acoustic Panel installs easily using the grommets provided on the top width edge and bottom corners.

**TECHNICAL CHARACTERISTICS**

- SIZE:** 4'x2', 2'x2', 4'x4', 4'x8', 4'x10'
- THICKNESS:** 2" (sizes up to 4'x10')
- CORE MATERIAL:** 1.65 lb acoustical fiberglass
- FINISH:** Nylon ripstop sailcloth
- INTENDED USE:** Interior, sound absorption
- FIRE RATING:** Class 1 or A per ASTM E 84 25/0/50
- NRC:** 1.35

**SUSPENSION PROVISION:** Factory installed Nickel plated Brass Grommets on width edge and one in each bottom corner (Stainless Steel or Black grommets available upon request)

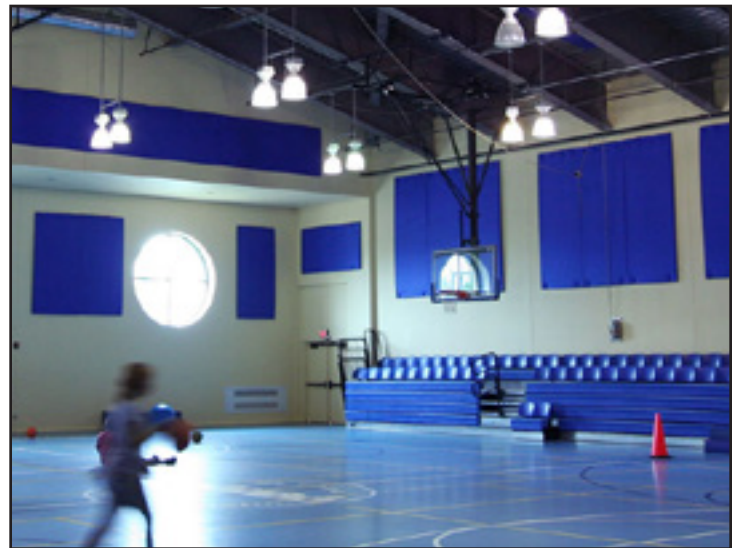

SOUND ABSORPTION SABINS PER UNIT						
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
2.29	5.43	10.82	13.58	13.44	12.83	1.35

