


## ROTOFAST™ POLYESTER SNAP-ON ANCHOR TECHNICAL DATA SHEET



### TECHNICAL CHARACTERISTICS

<b>SIZE:</b>	2" diameter
<b>MATERIAL:</b>	High strength styrene eye bolt
<b>PULL-OUT STRENGTH:</b>	50+lb in polyester board

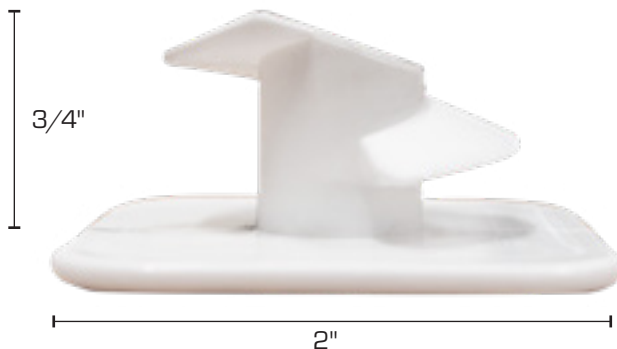

### DESCRIPTION

The Rotofast™ Polyester Snap On Anchor is an easy to use, two-part fastener system designed for use with most polyester core acoustical panels. Whether you are a contractor or just installing the panels yourself, the Rotofast Polyester Snap On Anchors are quick and efficient to install. These mechanical panel fasteners require no glue and relatively no time-consuming measurements. The anchors simply install into the back of the panel and allow you to mark where the anchors will mount. Then screw the ratchets to the wall and push the panel into place. It's that easy!

The Rotofast Panel Anchors may be used to fasten polyester core panels to drywall. The panel anchor is approximately 2 inches in diameter and less than 1 inch high. The Rotofast Polyester Snap On anchors are very secure and have been testing to have a pullout strength exceeding 50 lb. in standard polyester board. Each substrate (concrete block, wall board, wood) may require different types of fasteners to attach Rotofast Panel Anchors securely. The acoustical panels may contain any polyester core and be of a 1", 2", or greater thickness..

### FEATURES

- Quick and efficient to install
- Saves time and money
- Non-reactive: will not chemically react with polyester binders
- For use with polyester core acoustical panels
- Pullout strength exceeding 50 lb.

