


ALPHASORB[®] ANCHORAGE ACOUSTIC PANELS TECHNICAL DATA SHEET

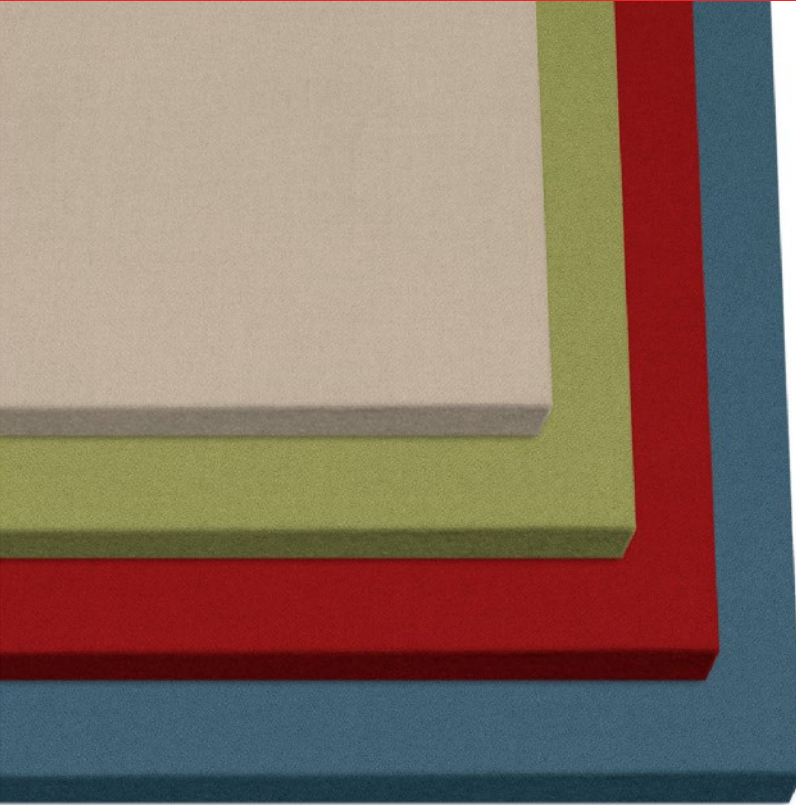

TECHNICAL CHARACTERISTICS

SIZE:	Up to 4' x 10'
THICKNESS:	1", 2" (Standard) 1/2" up to 4" (Custom)
DENSITY:	6-7 lb. / cu. ft. fiberglass
FINISH:	Guilford of Maine Anchorage Style 2335
EDGE DETAIL:	Square, Bevel, Miter Natural or Hardened
MOUNTING:	Impaling clips, Z-Clips, Rotofast, or as specified
FIRE RATING:	Class 1 or A per ASTM E84
NRC:	0.85 (1"), 1.10 (2")

DESCRIPTION

AlphaSorb[®] Anchorage Acoustical Wall Panels answer your acoustical and aesthetic needs at a cost much lower than other premium fabric wrapped acoustical panels. The AlphaSorb[®] Anchorage Acoustical Wall Panels are used to reduce noise reduction and reverberation. Available in a wide variety of sizes, shapes and vibrant colors, the Anchorage Panel line allow you to create an effective sound control treatment that is distinctly appropriate for your environment.

These acoustic panels come in standard or custom sizes, up to 4' x 10' and in a standard thicknesses of one inch or two inch. AlphaSorb[®] Anchorage Acoustical Wall Panels are Class A fire-rated and offer various edge details as well as installation options.

SOUND ABSORPTION							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1"	0.08	0.32	0.84	1.12	1.15	1.07	0.85
2"	0.47	0.85	1.24	1.19	1.20	1.11	1.10

