


SOUNDSUEDE™ ACOUSTIC CEILING CLOUDS TECHNICAL DATA SHEET

TECHNICAL CHARACTERISTICS

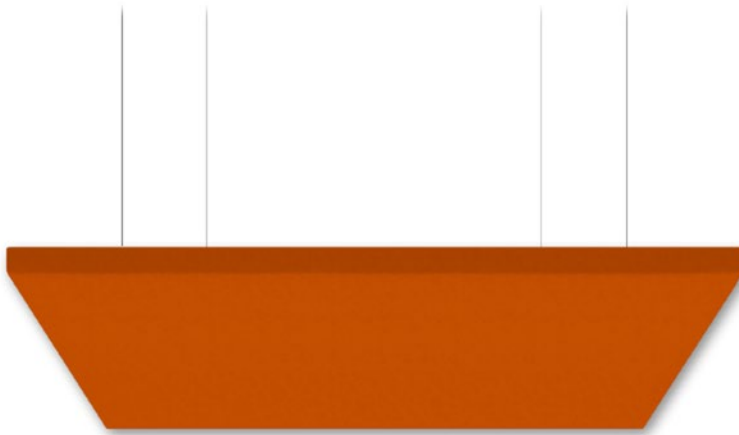

SIZE:	Up to 4' x 10'
THICKNESS:	1", 2" (Standard)
DENSITY:	6-7 lb. / cu. ft. fiberglass
FINISH:	SoundSuede™
EDGE DETAIL:	Square, Bevel, Miter Natural or Hardened
MOUNTING:	Impaling clips, Z-Clips, Rotofast, or as specified
FIRE RATING:	Class 1 or A per ASTM E84
NRC:	0.85 (1"), 1.10 (2")

DESCRIPTION

Our SoundSuede™ Ceiling Cloud offers a smooth, elegant finish in many vibrant colors to treat your space for aesthetics and acoustics. These clouds are suspended from the ceiling to absorb echo and reverberation to improve the sound quality.

Available in a wide variety of sizes and colors, SoundSuede™ cloud panels allow you to create an effective sound control treatment that is distinctly appropriate for your environment. These hanging clouds come in standard or custom sizes, up to 4' x 10' in 1" or 2" thicknesses.

SOUND ABSORPTION							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1"	0.05	0.33	0.86	1.07	1.12	1.08	0.85
2"	0.45	0.84	1.24	1.19	1.17	1.16	1.10

