

ALPHASORB[®] DESIGNER PREMIUM ACOUSTIC FELT CEILING TILES DATA SHEET



TECHNICAL CHARACTERISTICS


- MATERIALS:** Needle punched PET (polyethylene terephthalate) fiber, compressed into semi-rigid products
- COLORS:** Pale Grey, Raven Black, Smokey Grey, Snow White
- FIRE RESISTANCE:** E84 Class A Fire and Smoke
- SIZE:** 23-3/4" x 23-3/4"
- THICKNESS:** 1/4" Tegular – 1/4"
1" Tegular – 1"
Dimensional Sphere – 1/4"-3"
Dimensional Wave – 1/4"-2"
Recessed Round – 3" below grid + 1" above grid
- NRC:** 0.75 (Standard Tiles)

DESCRIPTION

Available in several styles and colors to add interest and sound absorption to your drop ceiling grid system. Use standard tiles on the perimeter, around vents, and anywhere there are sprinkler heads or motion sensors. Use molded tiles to create variation and dimension in your space.

FEATURES

- Drops in existing grid systems. Increased durability with installation into existing grid systems
- Flexible materials increase durability
- Made from 100% non-woven PET fibers.; up to 50% of the material is recycled
- No dust during installation
- Mold & Mildew resistant
- Stain-resistant and washable
- Designed, engineered, and manufactured in the US
- Multiple shapes available
- 2'x2' drop ceiling grid application

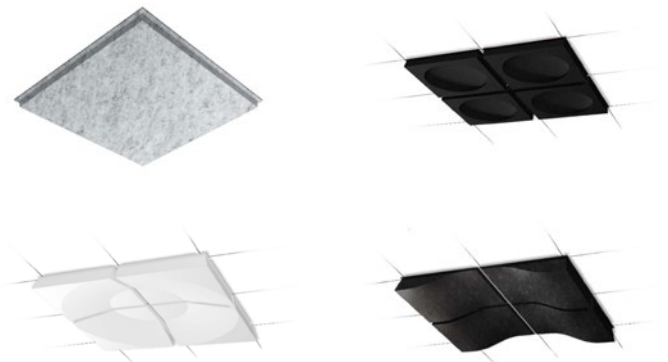

SOUND ABSORBING PERFORMANCE (STANDARD TILES)						
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
0.03	0.90	0.60	0.67	0.80	0.81	0.75

