

ISO-STEP[®] RUBBER GYM FLOORING DATA SHEET

DESCRIPTION

Our Iso-Step[®] Rubber Gym Flooring products are the perfect solution for gym renovations and new construction projects that require shock absorption and vibration sound control. They're perfect for gyms and workout spaces that are equipped with free weights, bench presses, treadmills, or elliptical machines. Our premium rubber flooring provides superior shock absorption, reducing the risk of injury, while providing superior sound control, helping to reduce noise and create a peaceful environment.

This slip-resistant, durable flooring offers an unbeatable combination of safety, strength, and aesthetic appeal. It's engineered to withstand wear and tear and is suitable for both home gyms and high-traffic commercial gym settings. It's also available in eight popular colors to suit any decor.



Installation is straightforward, and the flooring requires minimal maintenance to keep it looking its best. With its unbeatable combination of safety, strength, and style, this slip-resistant flooring is the ideal choice for any fitness setting.

We have several gym flooring types including mats, floor tiles, and rolls, so there's an option for spaces big and small. Our rubber flooring rolls offer wall-to-wall impact protection, easily covering large areas.


Each roll is 4' wide and comes in standard lengths of 15', 25', and 50'. They can also be ordered in custom lengths from 15' to 100' long. This makes them highly versatile and suitable for a variety of different spaces.

All our Iso-Step[®] Rubber Flooring products are Low VOC and eco-friendly, made from a high-quality 100% recycled rubber. Our gym flooring is made in the USA using recycled American pre- and post-consumer tires. By manufacturing locally, we are providing hardworking Americans with jobs and contributing to the growth of our community.

Iso-Step[®] Rubber Gym Flooring is available in rolls, tiles, or mats. Can be interlocking or straight cut. Available in black or 10% color. Additional color percentages require special ordering.



INTERLOCKING TILE DIMENSIONS

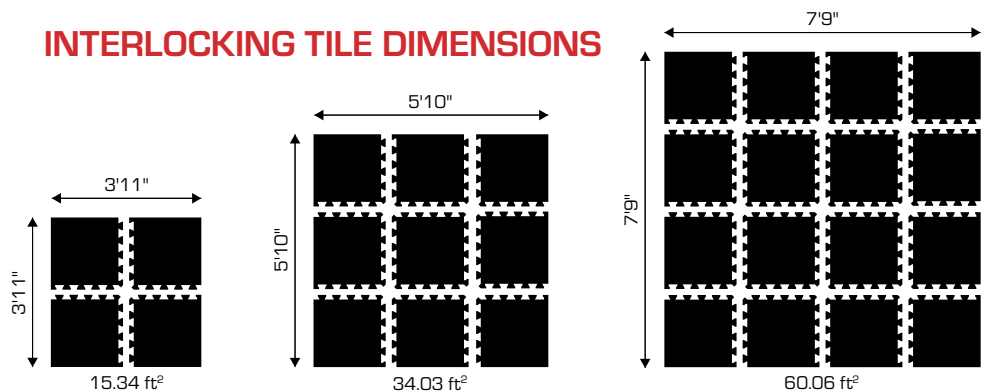

ISO-STEP[®] RUBBER GYM FLOORING DATA SHEET

TECHNICAL CHARACTERISTICS

ITEM	STANDARD	RATING FOR ROLLS AND TILES
Tensile Strength	ASTM D412	266 PSI
Density	ASTM D3576	65 lbs. / cubic foot
Tear Resistance	ASTM D413	Average Elongation at Break 1.55
Hardness	ASTM D2240	Shore A 65 +/-5
Compression Set	ASTM D395	-4.90%
VOC Emissions	ASTM D5116	0.5 mg/m ² or less
Flammability	ASTM D2859	PASS
Resistance to Chemicals	F-925-02	Resistant to most acids and chlorine
Coefficient of Friction	ASTM D1894/5	> 0.8

DIMENSIONS

Rolls and Tiles are available in 1/4", 8mm, 3/8", 1/2", & 3/4" thicknesses. Custom widths are also available. Mats are available at 4' x 6' in 1/4", 3/8", 1/2", & 3/4" thicknesses.

GYM FLOORING DIMENSIONS – ROLLS			
Roll Size	Thickness	Weight (lbs/sq ft)	Roll Weight
4' x 15'	1/4"	1.6	96
4' x 15'	8 mm	1.9	114
4' x 15'	3/8"	2.2	132
4' x 15'	1/2"	3	180
4' x 15'	3/4"	4	240
4' x 25'	1/4"	1.6	160
4' x 25'	8 mm	1.9	190
4' x 25'	3/8"	2.2	220
4' x 25'	1/2"	3	300
4' x 25'	3/4"	4	400
4' x 50'	1/4"	1.6	320
4' x 50'	8 mm	1.9	380
4' x 50'	3/8"	2.2	440
4' x 50'	1/2"	3	600
4' x 50'	3/4"	4	800

