


2420 Grenoble Road Richmond, VA 23294 Toll Free: 800-782-5742



WHISPERWAVE® CEILING CLOUD DATA SHEET

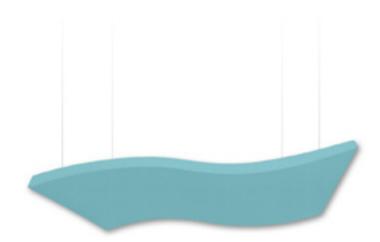

TECHNICAL CHARACTERISTICS

SIZE:	2' x 4'
THICKNESS:	2"
MATERIALS:	Open-cell melamine foam core
FIRE RATING:	Class 1 per ASTM E 84 Meets UL 1715 (willtec natural)
COLORS:	Natural White, Natural Grey, or HPC Coated Colors
MOUNTING:	Corkscrew hangers (sold separately are installed in the field for either wall-to-wall cable installation or ceilingmounted cable installation. Can be aligned in the same direction or arranged so that every other

DESCRIPTION

Whisperwave® Ceiling Cloud curved accent products allow you to unleash your creativity while reducing noise and reverberation. Add dimension and acoustical control right where you need it the most with Whisperwave® ceiling clouds.

Whisperwave® acoustical foam clouds are available in natural white, natural grey and HPC coated colors. The HPC coating is applied to all surfaces of the cloud. Made from Class 1 fire-rated melamine foam, Whisperwave® products are offered in standard sizes or they may also be customized for specific project requirements.

Whisperwave[®] ceiling clouds are lightweight and easy to install. Suspend these ceiling clouds using corkscrew hangers (sold separately). The corkscrew

 hangers mount into the back of the cloud and provide a mounting point for wire or cable. You can
purchase your cables, wire and other mounting hardware locally, or you can have your installer
provide these for you.



SOUND ABSORBING PERFORMANCE										
Thickness	Finish	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC		
2"	Natural Grey/White	0.11	0.33	0.85	1.05	1.09	1.06	0.85		
2"	HPC Coated	0.13	0.41	1.02	1.18	1.18	1.13	0.95		
3"	Natural Grey/White	0.09	0.68	1.20	1.18	1.12	1.05	1.05		
3"	HPC Coated	0.13	0.85	1.25	1.22	1.13	1.14	1.10		

baffle is turned 90 degrees.