


SONEX[®] CLASSIC FOAM DATA SHEET

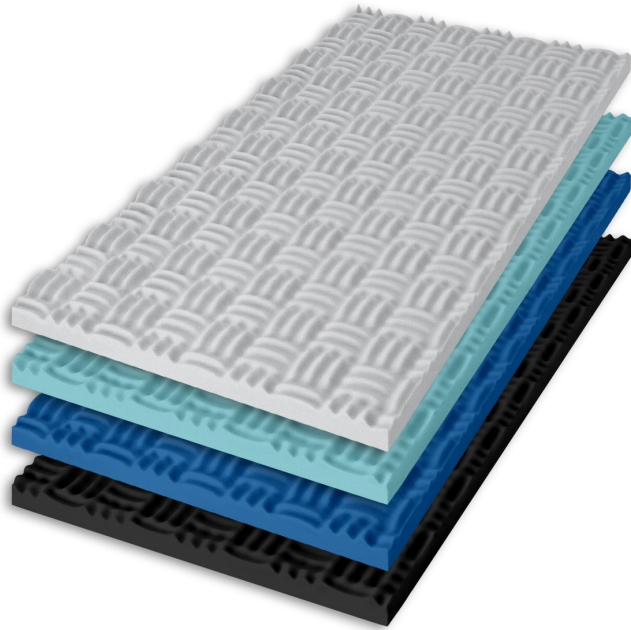

DESCRIPTION

Sonex[®] Classic Foam is an extremely popular foam because of its design, acoustical effectiveness and economical price point. Sonex[®] Classic Acoustic Foam features a modified anechoic wedge design for cost-effective and impressive sound control.

The unique geometric shape of the surface pattern on these panels provides optimum absorption and deflection of sound energy, making them an excellent choice for recording and broadcast studios or in any application where sound absorption is critically important.

Sonex[®] Classic is available in natural melamine foam colors (natural white, natural grey) or HPC coated colors. These panels can easily be mounted to any wall or ceiling surface with acouSTIC water-based adhesive.

TECHNICAL CHARACTERISTICS

SIZE: 2' x 4'

THICKNESS: 2"

MATERIALS: Open-cell melamine foam core

FIRE RESISTANCE: Class 1 per ASTM E 84 Meets UL 1715 (willtec natural)

COLORS: Natural White, Natural Grey or HPC Coated Colors

NRC: 0.80, 0.95

SOUND ABSORBING PERFORMANCE

Finish	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
Natural Grey/White	0.05	0.31	0.81	1.01	0.99	0.95	0.80
HPC Coated	0.13	0.41	1.02	1.18	1.18	1.13	0.95

