


SoundSuede™ Ceiling Cloud

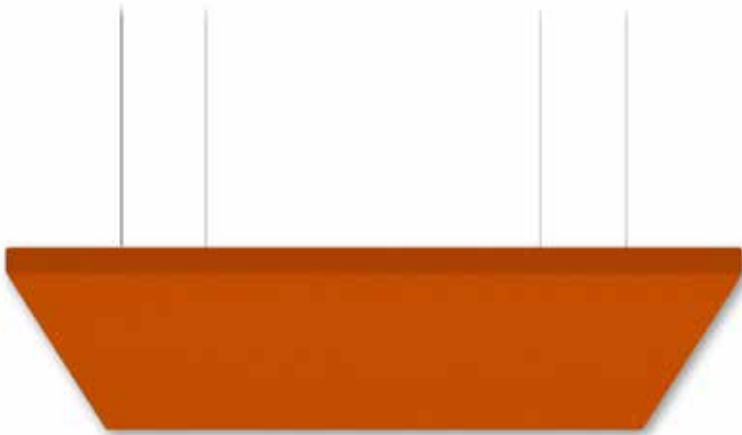

TECHNICAL CHARACTERISTICS

SIZE: up to 4' x 10'

THICKNESS: 1", 2" (Standard)

DENSITY: 6-7 lb. / cu. ft. fiberglass

FINISH: SoundSuede

EDGE DETAIL: Square, Bevel, Radius
Natural or Chemically Hardened

MOUNTING: Rotofast Cloud Mount Anchor

FIRE RATING: Class 1 or A per ASTM E84

NRC: 0.85 (1"), 1.15 (2")

DESCRIPTION

Our SoundSuede™ Ceiling Cloud offers a smooth, elegant finish in many vibrant colors to treat your space for aesthetics and acoustics. These clouds are suspended from the ceiling to absorb echo and reverberation to improve the sound quality.

Available in a wide variety of sizes and colors, SoundSuede cloud panels allow you to create an effective sound control treatment that is distinctly appropriate for your environment. These hanging clouds come in standard or custom sizes, up to 4' x 10' in 1" or 2" thicknesses.

SOUND ABSORPTION							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1"	0.14	0.27	0.80	1.11	1.14	1.14	0.85
2"	0.22	0.81	1.24	1.30	1.21	1.16	1.15

